


## Quick start for GeoS-5M EVK

### Overview

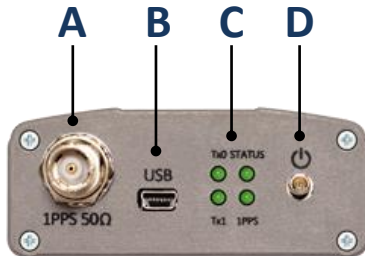


**A. 1PPS 50Ω output**

**B. USB port**

**C. LED indicators**

**D. Power On/Off switch**

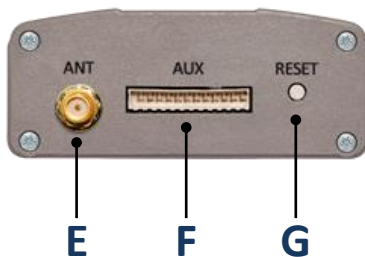

**E. Antenna connector**

**F. 12-pin auxiliary connector**

**G. Reset button**

### Setup

1. Download and install GeoSDemo<sup>®</sup> v5.x (and documentation) from <http://geostar-navi.com/en/software/>
2. Connect the GNSS antenna to EVK unit (E) and place the antenna under clear sky view.
3. Connect EVK's USB port (B) to a PC. (The USB driver will be installed automatically with GeoSDemo<sup>®</sup> software).
4. Switch the EVK unit on (D).
5. Launch GeoSDemo<sup>®</sup> software on PC, select COM ports manually or using autodetect function.
6. LEDs (C) will indicate GNSS operation and communication status.